

LT04-88U

Constant Temperature under Intelligent Control

High-precision computerized temperature control system: The cabinet has built-in high-sensitivity temperature sensors and an automatic temperature control module, ensuring a temperature control accuracy at 0.1° C inside the cabinet.

Security System

The well-developed audible & visual alarm system makes it safer for storage

Equipped with environmentally-friendly Freon-free refrigerant and compressor supplied by an international famous brand, the refrigerator is characterized by fast refrigeration and low noise.

Human-oriented

The spring switch for fan control can stop the fan motor when the door is opened and restart the fan motor automatically when the door is closed;

The high-quality steel wire shelves are easy to clean and convenient for storage and removal of things.





Control System

Electronic temperature controller; The digital average temperature display facilitates observation and monitoring of temperature inside the cabinet, and the precision of temperature display accuracy at 0.1°C.



Refrigeration System

Equipped with environmentally-friendly Freon-free refrigerant and compressor supplied by an international famous brand, the refrigerator is characterized by fast refrigeration and low noise. Air cooling: Fan for air circulation.



Anti-condensation heating function of the door

- ·The door has anti-condensation heating function, which is convenient for operation in an environment with high humidity.
- · The spring switch for fan control can stop the fan motor when the door is opened and restart the fan motor automatically when the door is closed.





Baskets for blood storage are optional and easy



Alam System

- · Built-in sensor for alarm, the well-developed alarm system (high/low temperature alarm, door opening alarm, high volt-age/low voltage alarm, sensor failure alarm, power outage alarm) makes it safer for storage; • Turn-on Delay & Stopping Interv al Prot-
- ection;
- The door is equipped with a lock (a padlock is optional), preventing it from opening accidentally.






Human-oriented

- · The high-quality steel wire shelves are easy to clean and convenient for storage and removal
- There are four universal casters at the bottom of the cabinet, which have the function of self-locking.


Scope of Application


Suitable for use in blood banks, hospitals, health and disease prevention systems, research institutions, colleges & universities, the electronic industry, biological engineering, laboratories in colleges & universities, military enterprises, deep-sea fishing companies, etc.

Performance Data / Cooling Curve

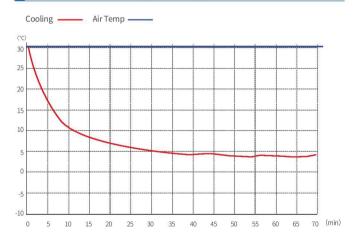

External Dimensions

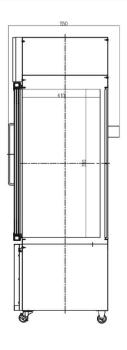

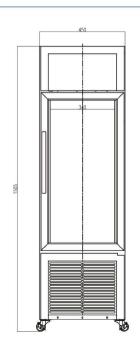

4±1°C Blood Bank Refrigerator	
Model	LT04-88U
Cabinet Type	Upright
Capacity(L)	88
Internal Size(W*D*H)mm	340*400*780
External Size(W*D*H)mm	450*550*1505
Package Size(W*D*H)mm	610*550*1670
NW/GW(Kgs)	100/124
Performance	
Temperature Range	4±1°C
Ambient Temperature	16-32°C
Cooling Performance	4°C
Climate Class	N
Controller	Microprocessor
Display	Digital display
Refrigeration	
Compressor	1pc
Cooling Method	Air cooling
Defrost Mode	Automatic
Refrigerant	R134a
Insulation Thickness(mm)	55
Construction	
External Material	Spray cold rolled steel plate
Inner Material	Stainless steel
Shelves	3(Stainless steel)
Door Lock with Key	Yes
Blood Basket	6
Access test Port	1pc. Ø 25 mm
Casters	4 (2 caster with brake)
Data Logging/Interval/Recording Time	Printer/Record every 20 minute / 7days
Door with heater	Yes
Alarm	
Temperature	High/Low temperature,
Electrical	Power failure , Low battery
System	Sensor error,Door ajar
Electrical	
Power Supply(V/HZ)	230±10%/50
Rated Power(W)	480
Input Power(W)	520
Power Consumption(KWh/24h)	3.6
Rated Current(A)	3

^{*}The model, parameters and performance specified in this brochure may be changed without prior notice because of product upgrading.

*There may be differences between the product images shown in this brochure and the actual products. When you are buying any product, please check the actual product.

